




**MARPOL**  
**LL4F 801-B**  
 Linear Low Density Polyethylene

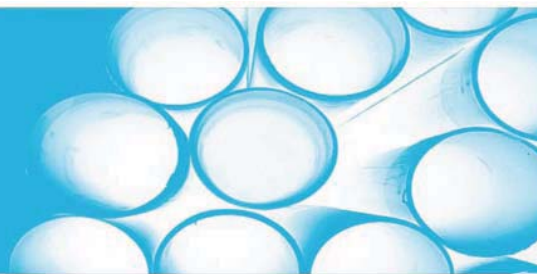

**PRODUCT DATA SHEET**

PROPERTY	VALUE	ASTM
Melt Index 190°C/ 2.16kg (g/10 min)	1.0	D 1238
Density (g/cm <sup>3</sup> )	0.918	
Dart Drop Impact, F50 (grams)	100	D 1709A
Tensile Strength at Yield (psi)	MD 1360 TD 1380	D 882
Tensile Strength at Break (psi)	MD 7710 TD 5120	D 882
Elongation at Break (%)	MD 580 TD 850	D 882
1% Secant Modulus (psi)	MD 28000 TD 32300	D 882
Elmendorf Tear Strength (g)	MD 80 TD 400	D 1922

**Additives:** Antiblock 5000 ppm, No Slip

**Product Description:** MARPOL LL4F 801-B is a butene LLDPE blown film resin. It has good drawdown and films produced from this resin display excellent toughness and tensile properties.

This information, to our knowledge, is believed to be correct. The use of this product in its actual conditions are beyond our control and satisfactory results for this product is the customer's sole responsibility.